

◎本手册仅用于说明产品的相关信息，公司随时可能因技术升级或采用更新的生产工艺而改进本手册有关内容，
或对本手册的印刷错误及不准确信息进行必要的更改，恕不另行通知。

◎未经许可，禁止全部或部分复制。

◎本公司拥有最终解释权，更多详细资料敬请垂询。



XMK 西门康端头

XMK 西门康端头

昆山西门康电子电气有限公司

KUNSHAN XIMENKAN ELECTRONIC&ELECTRIC CO.,LTD.

地址：江苏省昆山市淀山湖工业园区新兴路10号
ADD:No.10,Xinxing Road,Dianshanhu Industrial Park,
Kunshan,Jiangsu,China

电话/TEL:0512-55179555/55179990

传真/FAX:0512-55179957

Http://www.ximenkan.com

E-mail:ximenkan-terminals@hotmail.com 52504719@qq.com

全国免费服务热线：400-8877-335

XMK 西门康端头



Cold Pressing
Terminals & Connectors
冷压接线端头及接头

昆山西门康电子电气有限公司

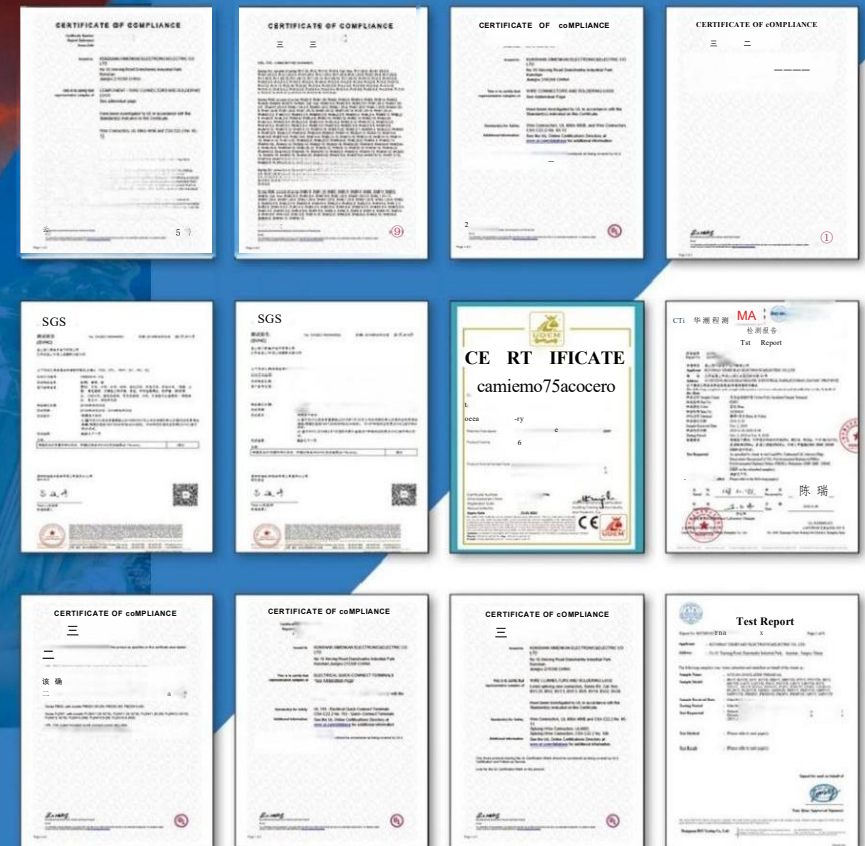
KUNSHAN XIMENKAN ELECTRONIC&ELECTRIC CO.,LTD.

Company Qualification

公司资质

Quality embodies our dignity, we make perfection more perfect. Standardized management system and systemized quality enable XMK products to be popular throughout the world.

To guarantee the stability and reliability of product quality, we have always flowed the international quality system and cried out strict detection and monitoring means to the products. Our high standard sees our everlasting pursuit of perfect brand. Our certificates are not only the honor we owned yesterday, but also the advancing power for more splendid tomorrow.



品质体现我们的尊严，一丝不苟，千锤百炼。标准化的管理体系和系统化的品质使西门康产品在世界的每一个角落都畅通无阻。

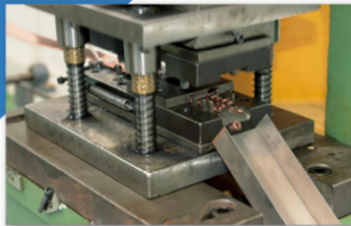
为保证产品质量的稳定性和可靠性，我们坚持国际化体系运行，并对产品的检测监控，我们的高标准是因为我们的品牌完美的追求，我们的诸多认证不仅仅是我们的荣誉，更是我们前进的动力。

Company Equipments

公司设备

严格的监测是产品质量的保证。不让一点瑕疵出现，不让质量问题损害西门康的品牌是我们的宗旨。我们建立了一整套合理有序的检测程序，在“我们追求0故障”思想的指导下，西门康绝不让一件不合格产品出厂，我们相信这既是对客户负责，更是对我们自己负责。

Strict monitoring is a guarantee of our product quality.No defect.no quality problem.which is our tenet.Abiding by the guideline of"zero fault",we have established a reasonable checkout program, we will not deliver even one non-conforming product, we believe it is responsible for both our customers and ourselves.



端头检测项目：

- | | | |
|--------------|-----------|-------------|
| 1. 外观尺寸检查 | 2. 压接电阻实验 | 3. 热循环实验 |
| 4. 镀层附着力实验 | 5. 震动实验 | 6. 拉力实验 |
| 7. 镀层厚度及成份实验 | 8. 盐雾实验 | 9. 插拔力实验 |
| 10. 短时耐受电流实验 | 11. 温升实验 | 12. 护套绝缘率实验 |



PVC绝缘套叉形端头

Vinyl-Insulated Spade Terminal



无绝缘套叉形端头

Non-Insulated Spade Terminal



尼龙绝缘套叉形端头

Nylon-Insulated Spade Terminal



尼龙绝缘套叉形端头

Heat Shrinkable-insulated Spade Terminals



PVC 绝缘套圆形端头

Vinyl-Insulated Ring Terminal



尼龙绝缘套圆形端头

Nylon-Insulated Ring Terminal



热缩全绝缘环形端子

Heat Shrinkable-insulated Ring Terminals



无绝缘套圆形端头

Non-Insulated Ring Terminal



PVC绝缘套片形端头
Vinyl-Insulated Blade Terminal



PVC 绝缘套针形端头
Vinyl-Insulated Pin Terminal



PVC绝缘套钩形端头
Vinyl-Insulated Hook Terminal



PVC绝缘套锁扣叉形端头
Vinyl-Insulated Locking Terminal



尼龙绝缘套片形端头
Nylon-Insulated Blade Terminal



尼龙绝缘套针形端头
Nylon-Insulated Pin Terminal



尼龙绝缘套钩形端头
Nylon-Insulated Hook Terminal



尼龙绝缘套锁扣叉形端头
Nylon-Insulated Locking Terminal



无绝缘套片形端头
Non-Insulated Blade Terminal



无绝缘套针形端头
Non-Insulated Pin Terminal



无绝缘套钩形端头
Non-Insulated Hook Terminal

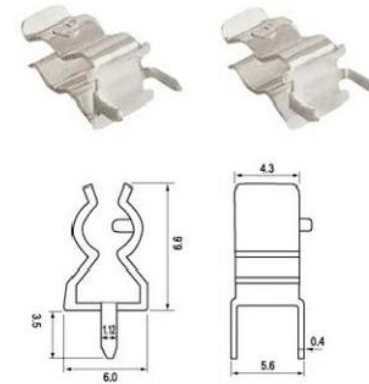
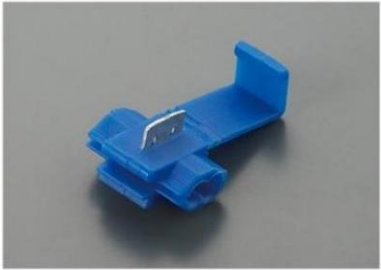


无绝缘套锁扣叉形端头
Non-Insulated Locking Terminal









异型端子

Different Terminals

C E © 盈 @ RoHS



车载铜牌折角端子

军工端子

海洋电缆连接头

R4~4转角定位端子

H-X



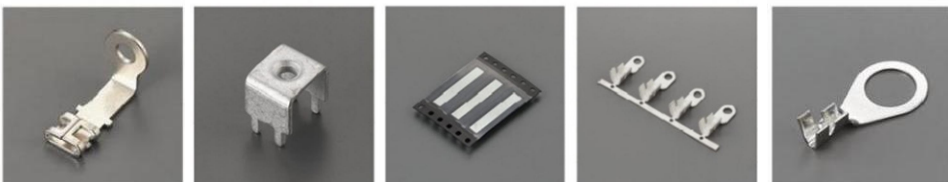
蹄线

RNB开口

PCB 板焊接螺柱

板端XMK-11

6.3插簧



车载电池模块底座

板端XMK-12

PCB 散热铜排

车载定位圆形端子连带

OT 开口双压



OT 开口

光伏逆变器铜牌

储能正极端子

L型带孔端子

光伏连接铜排



38-6右

储能负极端子

储能右端子-90

6.3锁扣插簧连带

38-6上

异型端子

Different Terminals

C E © © B @ RoHS



RNB-90长

通讯卷圆端子

RNB-90短

储能左端子

储能右端子



38-6右-45

储能右端子-R

汽车端子

汽车定位折角端子

折角90° 连带端头



新能源汽车端头






美国型加铜套增强型插簧

耐老化扎带




盐雾96小时绝缘子

接受任何形状端子非标定制……

公端 (187)
Male Terminal(187)

型号 Item no	材质厚度	材质 Material	尺寸Dimensionmm				适用电线Wire range	插片厚度 Tab thickness	包装数量 Q, TY/Reel	尺寸图 Dimension drawing		
			W	E	L	mm ²	A. W. G.					
H485F0-BS	0.5	黄铜Brass	4.8	6.3	14.7	0.5-15	20-16	0.5	3500/Reel			
H485S0-BS	0.5			5.9	14.0	0.5-15	20-16		7500/Reel			
H485S1-BS	0.5					0.3-0.75	22-18					
H488F0-BS	0.8			6.5	14.7	0.5-1.5	20-16	0.8	3500/Reel			
H488S0-BS	0.8			5.9	14.0		20-16		7500/Reel			
H485L3-BS	0.5	黄铜Brass	4.8	7.3	13.5			0.5	5000/Reel			
H488L3-BS	0.8							0.8				
H485L4-BS	0.5			6.5	12.5		0.5					
H488L0-BS	0.8						0.8					
H488L1-BS	0.8							0.8	2000/Reel			
H488L2-BS	0.8				7		14.6			0.8	5000/Reel	
H488L6-BS	0.8				4.75	11.3	128			0.8		

公端 (250)
Male Terminal(250)

型号 Item no	材质厚度	材质 Material	尺寸Dimensionmm			适用电线Wire range	插片厚度 Tab thickness	包装数量 Q, TY/Reel	尺寸图 Dimension drawing
			W	E	L	mm ²	A.W.G		
H635L0-B	0.5	黄铜Brass	6.3	8.0	14.0			0.5	
H638L0-B	0.8							0.8	
H635L1-B	0.5							0.5	
H635L1-B	0.8			7.8				0.8	
H638L3-B	0.5/0.8			7.3	15.5			0.5/0.8	
H638L4-B	0.5/0.8		6.35	8.3	15.8			0.5/0.8	
H638L6-B	0.8		6.3	8.1	19.8			0.8	
H638L7-B	0.8							0.8	
								0.8	
			6.3	8.1	19.8			0.8	
								0.8	
								0.8	