WEILI

股票代码：300904

PRODUCT SELECTION GUIDE

产品选型手册

风力发电领域

WIND POWER SECTOR

Chapter Overview
章节概览

威力传动
视一切挑战为机遇
致力于打造成为
全球最具竞争力的精密传动解决方案提供商

Embracing each challenge as an opportunity
Weili Transmission is committed to becoming the most competitive solution provider in precision transmission industry worldwide.

CONTENTS
目录

01 企业简介
Company Profile 01 / 02

02 全球市场&全球服务
Global Markets & Global Services 03

03 风力发电增速器
Wind Power Speeder 04 / 08

双馈增速器齿轮箱
Double-fed Main Gearbox of Wind Turbine

半直驱集成式增速器
Hybrid Integrated Main Gearbox

04 风力发电减速器
Wind Power Reducer 09 / 24

双法兰偏航驱动
Dual-flange Yaw Gearbox

双法兰变桨减速器
Dual-flange Pitch Gearbox

单法兰变桨减速器
Single-flange Pitch Gearbox

01 企业简介
Company Profile

成立于

2003 年

在职员工

2000+

研发、质量技术人员占比

20%

威力集团创立于2003年，总部位于中国宁夏银川，拥有员工超2000名，是全球精密传动技术领域领先的解决方案提供商，产品与服务覆盖风力发电机主齿轮箱与偏航变桨驱动、新能源汽车永磁电机与动力总成、工程机械减速器等业务领域。集团下属银川威力传动技术有限公司、银川威马电机有限责任公司、上海威郢新能源有限责任公司等子公司，持续践行"推动全球精密传动技术变革"的企业使命。威力传动2023年登陆深交所创业板，股票代码：300904。

威力集团秉持"生存靠质量、发展靠管理、腾飞靠创新"的发展理念，在银川和上海两地搭建200余人的跨学科研发系统，累计获得200余项核心技术专利，主导及参与制定近20项国家标准。

威力集团在德国汉堡、印度金奈等地设立海外技术服务中心，业务辐射亚洲、欧洲、中东等核心市场。

威力集团始终将社会责任深植企业基因，在脱贫攻坚、乡村振兴、抗灾救险、捐资助学、校企合作等领域倾力投入，以实际行动践行社会责任。获评"全国文明单位"，实现商业价值与社会责任的深度融合。

面向新时代发展机遇，威力集团将加速推进数字化转型与全球化市场拓展，致力于成为全球最具竞争力的精密传动解决方案领导者，为新能源产业变革与高端装备升级贡献中国智慧。

Founded in 2003 and headquartered in Yinchuan, Ningxia, China, Weili Group boasts over 2,000 employees and stands as a leading solution provider in the global precision transmission technology sector. Its products and services span various business areas, including wind turbine main gearboxes and yaw/pitch drives, permanent magnet motors and powertrains for new energy vehicles, and construction machinery reducers. The Group comprises subsidiaries such as Yinchuan Weili Transmission Technology Co., Ltd., Yinchuan Weima Motor Co., Ltd., and Shanghai Weiying New Energy Co., Ltd., all of which continuously fulfill the corporate mission of "driving global precision transmission technology transformation." In 2023, Weili Transmission made its debut on the ChiNext board of the Shenzhen Stock Exchange, with the stock code 300904.

Upholding the philosophy that "quality ensures survival, management drives development, and innovation fuels growth," Weili Group has established an interdisciplinary R&D system featuring over 200 experts across Yinchuan and Shanghai. The Group holds more than 200 core technology patents and has led or participated in the formulation of nearly 20 national standards.

With overseas technical service centers in Hamburg, Germany, and Chennai, India, Weili's business footprint now extends across core markets in Asia, Europe, and the Middle East.

Integrating social responsibility into its corporate DNA, Weili Group has made significant contributions to poverty alleviation, rural revitalization, disaster relief, educational philanthropy, and industry-academia collaboration. Recognized as a "National Model Company," Weili achieves a deep synergy between commercial value and social responsibility.

Facing the opportunities of the new era, Weili Group is accelerating its digital transformation and global expansion. We are committed to becoming the world's most competitive leader in precision transmission solutions, contributing Chinese expertise to the transformation of the new energy industry and the upgrading of high-end equipment.

02 全球市场&全球服务
Global Markets & Global Services

中国China

生产基地Production Base

银川威力传动技术股份有限公司（总部）
地址：银川市文萃南街600号
Yinchuan Weili Transmission Technology Co., Ltd. (Headquarters)
Address: 600 Wen Cui South Street, Yinchuan, Ningxia

鸡西威润传动有限责任公司
地址：鸡西市鸡冠区兴北街与北环东路交叉口西南260米
Jixi Weirun Transmission Co., Ltd.
Address: 260 meters southwest of the intersection of Xingbei Street and Beihuan East Road, Jiguan District, Jixi, Heilongjiang

服务中心Service Center

一区
辐射区域：
新疆、青海、西藏、甘肃西部
Zone 1
Coverage Area:
Xinjiang, Qinghai, Tibet, Western Gansu

二区
辐射区域：
宁夏、陕西、山西、河北
甘肃东部、蒙西
Zone 2
Coverage Area:
Ningxia, Shaanxi, Shanxi, Hebei, Eastern Gansu, Western Inner Mongolia

三区
辐射区域：
黑龙江、吉林、辽宁、蒙东
Zone 3
Coverage Area:
Heilongjiang, Jilin, Liaoning, Eastern Inner Mongolia

四区
辐射区域：
山东、河南、江苏、安徽、
湖北、河北、江西、浙江、福建
Zone 4
Coverage Area:
Shandong, Henan, Jiangsu, Anhui, Hubei, Hebei, Jiangxi, Zhejiang, Fujian

五区
辐射区域：
四川、重庆、湖南、贵州、
云南、广西、广东
Zone 5
Coverage Area:
Sichuan, Chongqing, Hunan, Guizhou, Yunnan, Guangxi, Guangdong

美国USA

销售/服务中心Sales/Service Center

地址/Address：2920 Telecom Pkwy Suite 400, Richardson

德国Germany

销售/服务中心Sales/Service Center

地址：Hein-Saß-Weg 21, Germany;

印度India

销售/服务中心

地址：Workafella Business Center-51,Level 4, Tower A Rattha Tek Meadows Old Mahabaliburam Road,Rajiv Gandhi Salai, Sholinganallur Chennai, Tamil Nadu, India

日本Japan

销售/服务中心Sales/Service Center

地址：13-106, 17-4-chome, Minamiaoyama, Minato City, Tokyo

生产 | 销售 | 服务

风力发电增速器 Wind Power Speeder 03

双馈增速器齿轮箱
Double-fed Main Gearbox of Wind Turbine

标准配置 Standard Configuration

序号	名称	型号规格
1	测振点	M6
2	温度传感器	PT100
3	放油球阀	G1-1/2"
4	磁性螺塞	M42×2
5	工作介质	ISO VG320
6	铭牌	200×125

No	Description	Type
1	Vibration Measuring Point	M6
2	Temperature Sensor	PT100
3	Drain Ball Valve	G1-1/2"
4	Magnetic Plug	M42×2
5	Working Medium	ISO VG320
6	Nameplates	200×125

产品选型 Product Selection

10MW 主轴集成式双馈增速器

10MW Main Shaft Integrated & Doubly-Fed Main Gearbox

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

产品型号	增速器主要性能参数						润滑系统技术参数					防腐等级
	增速比	额定输出扭矩(Nm)	极限输出扭矩(Nm)	齿轮箱安装倾角	生存温度(℃)	产品重量(kg)	总流量(L/min)	油泵电机额定功率(KW)	油泵电机额定电压(VAC)	油泵电机转速(rpm)	油泵电机参数频率(Hz)	
5X	178.24	6100	9252.2	8°	-45℃~50℃	45500	320	7/11	3-400	735/1465	50	C4H
6X	197.31	7473	12538.1	8°	-40℃~55℃	50000	400	9/13	3-400	730/1460	50	C4H
6X-3P1H	194.25	7454	13150	7°	-40℃~55℃	46200	460	9/13	3-400	730/1460	50	C4H
6X-3P1H	220.38	8237	14200	8°	-40℃~55℃	47500	460	9/13	3-400	730/1460	50	C4H
7X	219.91	9983.5	14990.8	8°	-40℃~55℃	53500	535	2-5.5/8	3-400	720/1450	50	C4H
8X	215.38	9095	17191	8°	-40℃~55℃	51800	660	2-5.5/8	3-400	720/1450	50	C4H
10X	217.46	13000	21448.4	8°	-40℃~55℃	56500	680	2-9/13	3-400	720/1450	50	C4H

Type	Main Performance Parameters of Main Gearbox						Lubrication System Technical Parameters					Anti-corrosion Class
	Ratio	Rated Output Torque (Nm)	Limit Output Torque (Nm)	Gearbox Mounting Angle	Survival Temperature (℃)	Product Weight (kg)	Total Flow Rate (L/min)	Oil Pump Motor Rated Power (KW)	Oil Pump Motor Rated Voltage (VAC)	Oil Pump Motor Speed (rpm)	Oil Pump Motor Frequency (Hz)	
5X	178.24	6100	9252.2	8°	-45℃~50℃	45500	320	7/11	3-400	735/1465	50	C4H
6X	197.31	7473	12538.1	8°	-40℃~55℃	50000	400	9/13	3-400	730/1460	50	C4H
6X-3P1H	194.25	7454	13150	7°	-40℃~55℃	46200	460	9/13	3-400	730/1460	50	C4H
6X-3P1H	220.38	8237	14200	8°	-40℃~55℃	47500	460	9/13	3-400	730/1460	50	C4H
7X	219.91	9983.5	14990.8	8°	-40℃~55℃	53500	535	2-5.5/8	3-400	720/1450	50	C4H
8X	215.38	9095	17191	8°	-40℃~55℃	51800	660	2-5.5/8	3-400	720/1450	50	C4H
10X	217.46	13000	21448.4	8°	-40℃~55℃	56500	680	2-9/13	3-400	720/1450	50	C4H

尺寸参数 Dimensional Parameters

单位：mm

产品型号	高速轴端面至LSS行星架端面长度	输入轴中心至润滑系统顶部高度	最大外圆	扭力臂跨距	输入接口直径/螺栓、销子分布圆直径	输出接口直径
5X	3363.5	2078	Φ2225	2850	Φ790H7	Φ160h6
6X	3756	1972.5	Φ2226	2880	Φ850H7	Φ160h6
6X-3P1H	3767	1899	Φ2230	2880	Φ850H7	Φ160h6
6X-3P1H	3847	2105.3	Φ2230	3050	Φ850H7	Φ160h6
7X	4046	1883	Φ2355	3100	Φ850H7	Φ190h6
8X	3519	2100.5	Φ2664	2880	Φ850H7	Φ160h6
10X	3600	/	Φ2615	/	Φ950 Φ1160	Φ180h6

Unit: mm

Type	Length from HSS Surface to LSS Planet Carrier Face	Height from Input Shaft Center to Top of Lubrication System	Maximum Outer Diameter	Torque Arm Span	Input Interface Diameter / Bolt & Pin Pitch Circle Diameter	Output Interface Diameter
5X	3363.5	2078	Φ2225	2850	Φ790H7	Φ160h6
6X	3756	1972.5	Φ2226	2880	Φ850H7	Φ160h6
6X-3P1H	3767	1899	Φ2230	2880	Φ850H7	Φ160h6
6X-3P1H	3847	2105.3	Φ2230	3050	Φ850H7	Φ160h6
7X	4046	1883	Φ2355	3100	Φ850H7	Φ190h6
8X	3519	2100.5	Φ2664	2880	Φ850H7	Φ160h6
10X	3600	/	Φ2615	/	Φ950 Φ1160	Φ180h6

半直驱集成式增速器
Hybrid Integrated Main Gearbox

标准配置 Standard Configuration

序号	名称	型号规格
1	测振点	M6
2	温度传感器	PT100
3	放油球阀	G1-1/2"
4	磁性螺塞	M42×2
5	工作介质	ISO VG320
6	铭牌	200×125

No	Description	Type
1	Vibration Measuring Point	M6
2	Temperature Sensor	PT100
3	Drain Ball Valve	G1-1/2"
4	Magnetic Plug	M42×2
5	Working Medium	ISO VG320
6	Nameplates	200×125

产品选型 Product Selection

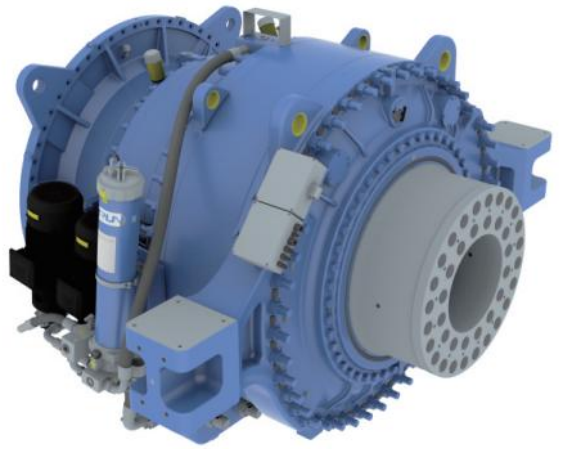

5.6MW 半直驱集成式增速器

5.6MW Semi-Direct & Integrated Main Gearbox

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

产品型号	增速器主要性能参数						润滑系统技术参数					防腐等级
	增速比	额定输出扭矩(Nm)	极限输出扭矩(Nm)	齿轮箱安装倾角	生存温度(℃)	产品重量(kg)	总流量(L/min)	油泵电机额定功率(KW)	油泵电机额定电压(VAC)	油泵电机转速(rpm)	油泵电机参数频率(Hz)	
5X	76.43	6400	10760	8°	-40℃~55℃	34800	300	7/11	3-400	730/1450	50	C4H
6X	73.86	7200	12031	8°	-40℃~55℃	39000	340	7/11	3-400	730/1450	50	C4H

Type	Main Performance Parameters of Main Gearbox						Lubrication System Technical Parameters					Anti-corrosion Class
	Ratio	Rated Output Torque (Nm)	Limit Output Torque (Nm)	Gearbox Mounting Angle	Survival Temperature (℃)	Product Weight (kg)	Total Flow Rate (L/min)	Oil Pump Motor Rated Power (KW)	Oil Pump Motor Rated Voltage (VAC)	Oil Pump Motor Speed (rpm)	Oil Pump Motor Frequency (Hz)	
5X	76.43	6400	10760	8°	-40℃~55℃	34800	300	7/11	3-400	730/1450	50	C4H
6X	73.86	7200	12031	8°	-40℃~55℃	39000	340	7/11	3-400	730/1450	50	C4H

尺寸参数 Dimensional Parameters

单位：mm

产品型号	总长度	最大外径	扭力臂跨距	输入接口螺栓、销子分布圆直径	输出接口螺栓分布圆直径
5X	3282.5	Φ2180	3200	Φ952 Φ830 Φ698	Φ330
6X	3398.5	Φ2180	3200	Φ952 Φ830 Φ698	Φ330

Unit: mm

Type	Total Length	Maximum Outer Diameter	Torque Arm Span	Input Interface Bolt & Pin Pitch Circle Diameter	Output Interface Bolt Pitch Circle Diameter
5X	3282.5	Φ2180	3200	Φ952 Φ830 Φ698	Φ330
6X	3398.5	Φ2180	3200	Φ952 Φ830 Φ698	Φ330

风力发电减速器 04
Wind Power Reducer

双法兰偏航驱动
Dual Flange Yaw Drive

标准配置 Standard Configuration

序号	名称	型号规格
1	通风器	M12X1.75
2	标牌	80x50
3	吊耳	ϕ25x6
4	内六角螺塞（放油螺塞）	G1/2"
5	内六角螺塞（注脂螺塞）	M10x1.0
6	内六角螺塞（加油螺塞）	G3/8"
7	圆油标	M36X1.5
8	内六角螺塞（放油球阀）	G1/2"

No	Description	Type
1	Ventilator	M12X1.75
2	Nameplate	80x50
3	Lifting lug	ϕ25x6
4	Hex socket plug (Oil Drain Plug)	G1/2"
5	Hex socket plug (Grease Injecting Plug)	M10x1.0
6	Hex Socket Set Screw (Oil Filling Plugs)	G3/8"
7	Round Oil Level Indicator	M36X1.5
8	Hex socket plug (Oil Drain Ball Valve)	G1/2"

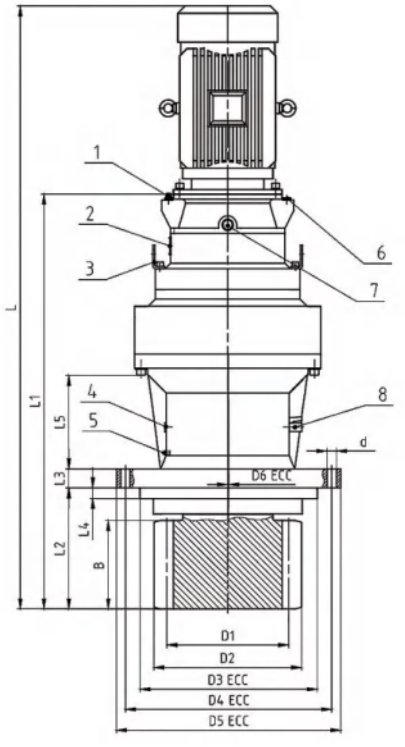

产品选型 Product Selection

10MW 偏航减速器
10MW Yaw Gearbox

双法兰偏航驱动
Dual Flange Yaw Drive

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

产品型号	减速器主要性能参数						驱动齿轮技术参数					电机技术参数					防腐等级
	速比	额定输出扭矩(Nm)	极限输出扭矩(Nm)	环境温度	工作温度	产品重量(kg)	模数	齿数	齿宽(mm)	压力角	变位系数	额定功率(kw)	额定电压	额定转速(rpm)	电机频率(Hz)	制动力矩(Nm)	
P503B	1448.55	21560	60000	-40℃~50℃	-30℃~40℃	303	m=16	z=13	b=130	20	+0.5	2.2	400V/△	1410	50	30	C4-H
P5316B	951.15	16825	60000	-40℃~50℃	-30℃~45℃	310	m=16	z=13	b=130	20	+0.5	2.2	400V/Y	940	50	50	C4
P205K	958.78	21600	60000	-40℃~50℃	-40℃~50℃	307	m=16	z=13	b=130	20	+0.5	2.2	400/690V (△/Y)	940	50	50	C4-H
P5221A	951.146	16225	61000	-40℃~50℃	-35℃~40℃	305	m=16	z=13	b=130	20	+0.5	2.2	400V/Y	940	50	45	C4-H
P755A	1179.829	28937	75000	-40℃~50℃	-30℃~50℃	307	m=16	z=13	b=145	20	+0.5	2.2	400/690V (△/Y)	940	50	55	C4-VH
P7021A	1179.829	16253	75000	-40℃~50℃	-30℃~40℃	340	m=16	z=13	b=145	20	+0.5	2.5	400V/Y	940	50	45	C4-H
P758A	1179.83	29000	75000	—	-30℃~50℃	308	m=16	z=13	b=145	20	+0.5	—	—	—	—	—	C4
P3029A	1953.61	45213	99500	—	-10℃-55℃	543.5	m=20	z=14	b=165	20	+0.5	5	400/690V	1420	50	40	C4-H
P3315A	2923.26	60865	150000	-40℃~55℃	-35℃~50℃	676	m=20	z=16	b=200	20	+0.5	3	690V(Y)/ 400(△)	1415	50	45	C4-H
P5025A	1249.07	26450	150000	-40℃~60℃	-30℃~55℃	610	m=20	z=14	b=190	20	+0.5	—	—	—	—	—	C3-H
P5025B	1260.51	22565	185000	-40℃~60℃	-30℃~55℃	619	m=20	z=14	b=190	20	+0.5	—	—	—	—	—	C3-H
P1008B	1597.99	53820	165000	-40℃~50℃	-30℃~40℃	610	m=20	z=14	b=170	20	+0.5	3	400V/△	940	50	80	C4
P1208B	1597.99	51000	165000	-40℃~50℃	-30℃~40℃	657	m=20	z=14	b=170	20	+0.5	4.5	400V/△	940	50	80	C4
P1303A	2032.29	43921	182000	-45℃~50℃	-30℃~40℃	760	m=24	z=12	b=245	20	+0.5	3.5	400V/△	940	50	60	C4-H
P1003B	2032.29	28890	221000	-20℃~50℃	-10℃~40℃	830	m=24	z=12	b=245	20	+0.5	4.0	400V/△	950	50	90	C4-H
P1103B	2032.29	22365	221000	-20℃~50℃	-10℃~40℃	830	m=24	z=12	b=245	20	+0.5	4.0	400V/△	950	50	90	C4-VH
P1203B	2032.29	45115	221000	-20℃~50℃	-10℃~40℃	871	m=24	z=12	b=245	20	+0.5	4	400V/△	950	50	90	C3-VH
P6035A	1582.7	39805	177000	-25℃~60℃	-40℃~60℃	668	m=22	z=12	b=214	20	+0.5	—	—	—	—	—	C3
P8022A	1230.45	35780	182700	-10℃~50℃	-20℃~60℃	715	m=20	z=13	b=220	20	+0.5	4	400/690V	950	50	50	C4-VH
WLP75T 4B1175D	1184.87	26730	75000	-50℃~60℃	-40℃~50℃	245	m=16	z=13	b=145	20	+0.5	—	—	—	—	—	C4-H
WLP75T 4B1175K	1184.87	26730	75000	-50℃~60℃	-40℃~50℃	271	m=16	z=13	b=145	20	+0.5	—	—	—	—	—	C4-H
WLP107T 4B1372A	1365.08	30360	107000	-50℃~60℃	-40℃~50℃	450	m=20	z=14	b=150	20	+0.5	3	400/690V (△/Y)	940	50	60±15%	C4-H
WLP221T 4B2035D	2032.29	48320	221000	-45℃~50℃	-30℃~40℃	832	m=24	z=12	b=245	20	+0.5	4	400V/△	940	50	90±15%	C4-H
WLP61T 4B960B	963.845	16225	61000	-45℃~50℃	-30℃~40℃	276	m=16	z=13	b=130	20	+0.5	2.2	400V/(Y)	940	50	45±15%	C4-H

双法兰偏航驱动
Dual Flange Yaw Drive

尺寸参数 Dimensional Parameters

产品型号	L	LI	L2	L3	L4	L5	D1	D2	D3	D4	D5	D6	B	d
P503B	1136	715	213	20	20	108	Φ208	Φ254.5	Φ320f7	Φ370	Φ400	1.5	130	20-Φ17.5均布
P5316B	1074	674	213	30	30	98	Φ208	Φ254.5h11	Φ320f7	Φ370	Φ400	1.5	130	26-Φ17.5均布
P205K	1180	715	213	20	20	110	Φ208	Φ254.5	Φ320f7	Φ370	Φ400	1.5	130	20-Φ17.5均布
P5221A	1059	664	213	20	20	110	Φ208	Φ254.5	Φ320f7	Φ370	Φ400	1.5	130	24-Φ17.5均布
P755A	1279	814	228	25	35	164	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5均布
P7021A	1170	747	228	25	20	139	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	34-Φ17.5均布
P758A	—	822	228	25	35	166	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5均布
P3029A	1308	908	287.5	37	25	125	Φ280	Φ335h11	Φ410f7	Φ450	Φ490	2.5	165	24-Φ21均布
P3315A	1492	1062	360	40	90	181.5	Φ320	Φ380h9	Φ415f7	Φ490	Φ530	2.5	200	24-Φ22均布
P5025A	—	935	287	40	30	176	Φ208	Φ335h11	Φ420f7	Φ480	Φ530	1.5	190	32-Φ21均布
P5025B	—	903.5	287	40	30	170	Φ280	Φ335h11	Φ420f7	Φ480	φ517	1.5	190	32-Φ21
P1008B	1311.5	813.5	255	37	20	173	Φ208	Φ335h11	Φ430f7	Φ470	Φ510	2.5	170	28-Φ22均布
P1208B	1401.5	903.5	255	37	20	171	Φ208	Φ335h11	Φ430f7	Φ470	Φ510	2.5	170	28-Φ22均布
P1303A	1560	1077	347	50	50	214	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30均布
P1003B	1573.5	1073.5	347	50	50	234	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30均布
P1103B	1573.5	1073.5	347	50	50	234	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30均布
P1203B	1573.5	1073.5	347	50	50	234	Φ288	Φ356h11	Φ490f7	Φ570	Φ620	2.5	245	24-Φ30均布
P6035A	—	986	333	70	70	109	Φ264	Φ328	Φ420h7	Φ525	Φ575	0	214	26-Φ26
P8022A	1459	989	319	70	22	199	Φ260	Φ319.8	Φ420h7	Φ460	Φ508	1.5	220	28-Φ26
WLP75T 4B1175D	—	649	228	25	20	—	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5
WLP75T 4B1175K	—	729.5	228	25	20	—	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5
WLP107T 4B1372A	1241	811	270	35	35	115	Φ280	Φ338h11	Φ365h7	Φ400	Φ437	1.5	150	24-Φ22
WLP221T 4B2035D	1543	1043	347	50	50	234	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30
WLP61T 4B960B	1041	634	213	20	20	65	Φ208	Φ254.5h11	Φ320f7	Φ370	Φ400	1.5	130	24-Φ17.5

双法兰偏航驱动
Dual Flange Yaw Drive

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

Type	Reducer Main Performance Parameters						Driving Gear Technical Parameters					Motor Technical Parameters					Anti-corrosion Class
	Ratio	Rated Output Torque (Nm)	Limit Output Torque (Nm)	Ambient Tempe-rature	Operating Tempe-rature	Product Weight (Kg)	Module	Teeth Number	Face Width (mm)	Pressure Angle	Profile Shift Coefficient	Rated Power (kW)	Rated Voltage	Rated Speed (rpm)	Motor Frequency (Hz)	Braking Torque (Nm)	
P503B	1448.55	21560	60000	-40℃~50℃	-30℃~40℃	303	m=16	z=13	b=130	20	+0.5	2.2	400V/△	1410	50	30	C4-H
P5316B	951.15	16825	60000	-40℃~50℃	-30℃~45℃	310	m=16	z=13	b=130	20	+0.5	2.2	400V/Y	940	50	50	C4
P205K	958.78	21600	60000	-40℃~50℃	-40℃~50℃	307	m=16	z=13	b=130	20	+0.5	2.2	400/690V (△/Y)	940	50	50	C4-H
P5221A	951.146	16225	61000	-40℃~50℃	-35℃~40℃	305	m=16	z=13	b=130	20	+0.5	2.2	400V/Y	940	50	45	C4-H
P755A	1179.829	28937	75000	-40℃~50℃	-30℃~50℃	307	m=16	z=13	b=145	20	+0.5	2.2	400/690V (△/Y)	940	50	55	C4-VH
P7021A	1179.829	16253	75000	-40℃~50℃	-30℃~40℃	340	m=16	z=13	b=145	20	+0.5	2.5	400V/Y	940	50	45	C4-H
P758A	1179.83	29000	75000	—	-30℃~50℃	308	m=16	z=13	b=145	20	+0.5	—	—	—	—	—	C4
P3029A	1953.61	45213	99500	—	-10℃-55℃	543.5	m=20	z=14	b=165	20	+0.5	5	400/690V	1420	50	40	C4-H
P3315A	2923.26	60865	150000	-40℃~55℃	-35℃~50℃	676	m=20	z=16	b=200	20	+0.5	3	690V(Y)/ 400(△)	1415	50	45	C4-H
P5025A	1249.07	26450	150000	-40℃~60℃	-30℃~55℃	610	m=20	z=14	b=190	20	+0.5	—	—	—	—	—	C3-H
P5025B	1260.51	22565	185000	-40℃~60℃	-30℃~55℃	619	m=20	z=14	b=190	20	+0.5	—	—	—	—	—	C3-H
P1008B	1597.99	53820	165000	-40℃~50℃	-30℃~40℃	610	m=20	z=14	b=170	20	+0.5	3	400V/△	940	50	80	C4
P1208B	1597.99	51000	165000	-40℃~50℃	-30℃~40℃	657	m=20	z=14	b=170	20	+0.5	4.5	400V/△	940	50	80	C4
P1303A	2032.29	43921	182000	-45℃~50℃	-30℃~40℃	760	m=24	z=12	b=245	20	+0.5	3.5	400V/△	940	50	60	C4-H
P1003B	2032.29	28890	221000	-20℃~50℃	-10℃~40℃	830	m=24	z=12	b=245	20	+0.5	4.0	400V/△	950	50	90	C4-H
P1103B	2032.29	22365	221000	-20℃~50℃	-10℃~40℃	830	m=24	z=12	b=245	20	+0.5	4.0	400V/△	950	50	90	C4-VH
P1203B	2032.29	45115	221000	-20℃~50℃	-10℃~40℃	871	m=24	z=12	b=245	20	+0.5	4	400V/△	950	50	90	C3-VH
P6035A	1582.7	39805	177000	-25℃~60℃	-40℃~60℃	668	m=22	z=12	b=214	20	+0.5	—	—	—	—	—	C3
P8022A	1230.45	35780	182700	-10℃~50℃	-20℃~60℃	715	m=20	z=13	b=220	20	+0.5	4	400/690V	950	50	50	C4-VH
WLP75T 4B1175D	1184.87	26730	75000	-50℃~60℃	-40℃~50℃	245	m=16	z=13	b=145	20	+0.5	—	—	—	—	—	C4-H
WLP75T 4B1175K	1184.87	26730	75000	-50℃~60℃	-40℃~50℃	271	m=16	z=13	b=145	20	+0.5	—	—	—	—	—	C4-H
WLP107T 4B1372A	1365.08	30360	107000	-50℃~60℃	-40℃~50℃	450	m=20	z=14	b=150	20	+0.5	3	400/690V (△/Y)	940	50	60±15%	C4-H
WLP221T 4B2035D	2032.29	48320	221000	-45℃~50℃	-30℃~40℃	832	m=24	z=12	b=245	20	+0.5	4	400V/△	940	50	90±15%	C4-H
WLP61T 4B960B	963.845	16225	61000	-45℃~50℃	-30℃~40℃	276	m=16	z=13	b=130	20	+0.5	2.2	400V/(Y)	940	50	45±15%	C4-H

双法兰偏航驱动
Dual Flange Yaw Drive

尺寸参数 Dimensional Parameters

Type	L	LI	L2	L3	L4	L5	D1	D2	D3	D4	D5	D6	B	d
P503B	1136	715	213	20	20	108	Φ208	Φ254.5	Φ320f7	Φ370	Φ400	1.5	130	20-Φ17.5均布
P5316B	1074	674	213	30	30	98	Φ208	Φ254.5h11	Φ320f7	Φ370	Φ400	1.5	130	26-Φ17.5均布
P205K	1180	715	213	20	20	110	Φ208	Φ254.5	Φ320f7	Φ370	Φ400	1.5	130	20-Φ17.5均布
P5221A	1059	664	213	20	20	110	Φ208	Φ254.5	Φ320f7	Φ370	Φ400	1.5	130	24-Φ17.5均布
P755A	1279	814	228	25	35	164	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5均布
P7021A	1170	747	228	25	20	139	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	34-Φ17.5均布
P758A	—	822	228	25	35	166	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5均布
P3029A	1308	908	287.5	37	25	125	Φ280	Φ335h11	Φ410f7	Φ450	Φ490	2.5	165	24-Φ21均布
P3315A	1492	1062	360	40	90	181.5	Φ320	Φ380h9	Φ415f7	Φ490	Φ530	2.5	200	24-Φ22均布
P5025A	—	935	287	40	30	176	Φ208	Φ335h11	Φ420f7	Φ480	Φ530	1.5	190	32-Φ21均布
P5025B	—	903.5	287	40	30	170	Φ280	Φ335h11	Φ420f7	Φ480	ϕ517	1.5	190	32-Φ21
P1008B	1311.5	813.5	255	37	20	173	Φ208	Φ335h11	Φ430f7	Φ470	Φ510	2.5	170	28-Φ22均布
P1208B	1401.5	903.5	255	37	20	171	Φ208	Φ335h11	Φ430f7	Φ470	Φ510	2.5	170	28-Φ22均布
P1303A	1560	1077	347	50	50	214	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30均布
P1003B	1573.5	1073.5	347	50	50	234	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30均布
P1103B	1573.5	1073.5	347	50	50	234	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30均布
P1203B	1573.5	1073.5	347	50	50	234	Φ288	Φ356h11	Φ490f7	Φ570	Φ620	2.5	245	24-Φ30均布
P6035A	—	986	333	70	70	109	Φ264	Φ328	Φ420h7	Φ525	Φ575	0	214	26-Φ26
P8022A	1459	989	319	70	22	199	Φ260	Φ319.8	Φ420h7	Φ460	Φ508	1.5	220	28-Φ26
WLP75T 4B1175D	—	649	228	25	20	—	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5
WLP75T 4B1175K	—	729.5	228	25	20	—	Φ208	Φ254.5h11	Φ330f7	Φ370	Φ400	1.5	145	30-Φ17.5
WLP107T 4B1372A	1241	811	270	35	35	115	Φ280	Φ338h11	Φ365h7	Φ400	Φ437	1.5	150	24-Φ22
WLP221T 4B2035D	1543	1043	347	50	50	234	Φ288	Φ356h11	Φ450h8	Φ500	Φ550	2.5	245	24-Φ30
WLP61T 4B960B	1041	634	213	20	20	65	Φ208	Φ254.5h11	Φ320f7	Φ370	Φ400	1.5	130	24-Φ17.5

双法兰变桨减速器
Dual Flange Variable Pitch Gearbox

标准配置 Standard Configuration

序号	名称	型号规格
1	内六角螺塞（注脂螺塞）	M10X1.0
2	内六角螺塞（加油螺塞）	G3/8"
3	标牌	80X50
4	内六角螺塞（放油螺塞）	G1/2"
5	内六角螺塞（注脂螺塞）	M10x1.0
6	圆油标	M18x1.5
7	内六角螺塞（放油球阀）	G1/2"

No	Description	Type
1	Hex socket plug (Grease Injecting Plug)	M10X1.0
2	Hex Socket Set Screw (Oil Filling Plugs)	G3/8"
3	Nameplate	80X50
4	Hex socket plug (Oil Drain Plug)	G1/2"
5	Hex socket plug (Grease Injecting Plug)	M10x1.0
6	Round Oil Level Indicator	M18x1.5
7	Hex socket plug (Oil Drain Ball Valve)	G1/2"

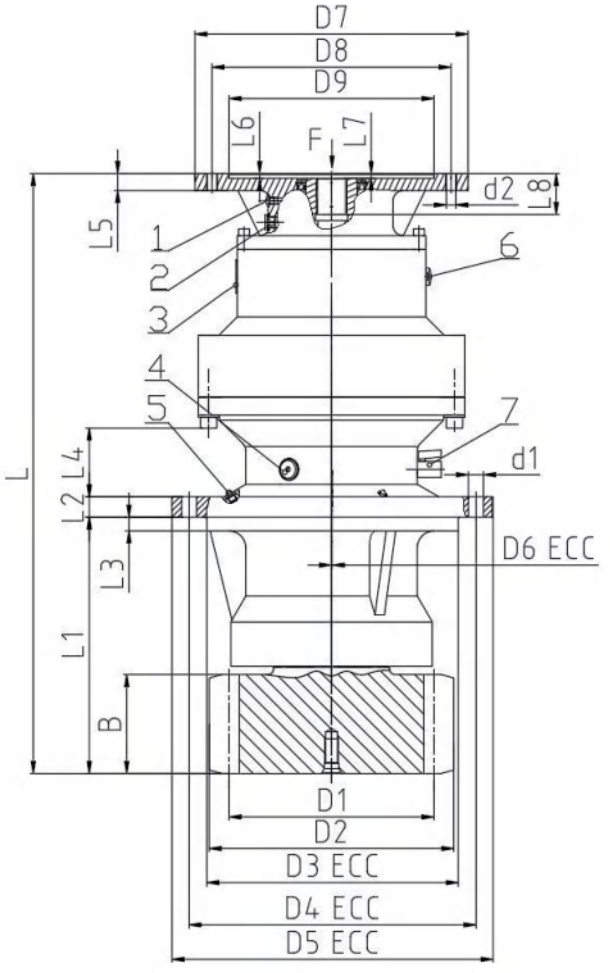

产品选型 Product Selection

12MW 变桨减速器
12MW Pitch Gearbox

双法兰变桨减速器
Dual Flange Variable Pitch Gearbox

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

产品型号	减速器主要性能参数						驱动齿轮技术参数					防腐等级
	速比	额定输出扭矩 (Nm)	极限输出扭矩 (Nm)	环境温度	工作温度	产品重量 (kg)	模数	齿数	齿宽 (mm)	压力角	变位系数	
B3029A	155.63	10450	23500	-40℃~60℃	-30℃~60℃	278.5	m=16	z=15	b=160	20	+0.5	C4-H
B5025A	196.67	13800	39200	-40℃~60℃	-30℃~55℃	263	m=16	z=15	b=130	20	+0.5	C3-H
B3032A	192.03	12500	55000	-20℃~50℃	-10℃~40℃	285	m=14	z=16	b=130	20	+0.5	C3
B7521A	210.974	18535	56000	-40℃~50℃	-30℃~40℃	280	m=14	z=15	b=160	20	+0.5	C4-H
B1103A	235.71	36201	75000	-40℃~50℃	-30℃~40℃	390	m=16	z=15	b=170	20	+0.5	C4-VH
B6016A	244.57	30425	79750	-40℃~50℃	-30℃~40℃	370	m=16	z=15	b=165	20	+0.5	C3-VH
B5020A	234.95	29461	80000	-45℃~60℃	-40℃~55℃	390	m=16	z=15	b=170	20	+0.5	C4-H
B5019B	234.95	32568	93200	-40℃~50℃	-30℃~40℃	526	m=20	z=15	b=170	20	+0.5	C4
B7321A	229.802	16770	109000	-40℃~50℃	-30℃~40℃	500	m=16	z=15	b=205	20	+0.5	C4-H
B905A	239.14	30240	95000	-40℃~50℃	-30℃~50℃	468	m=16	z=15	b=170	20	+0.5	C4-VH
B1803A	231.43	39760	100000	-40℃~50℃	-30℃~40℃	545	m=20	z=15	b=170	20	+0.5	C4-VH
B505F	209.16	32075	125000	-40℃~50℃	-30℃~40℃	595	m=18	z=14	b=180	20	+0.5	+0.5
B705A	209.16	32220	125000	-40℃~50℃	-30℃~40℃	600	m=18	z=14	b=180	20	+0.5	C4-VH
B1203A	260.33	42900	130000	-40℃~50℃	-30℃~40℃	660	m=20	z=15	b=210	20	+0.5	C4-VH
B655A	213.9	18375	65000	-40℃~55℃	-30℃~50℃	315	m=14	z=15	b=160	20	+0.5	C4-VH
B6615A	230	28265	70000	-50℃~60℃	-40℃~50℃	380	m=16	z=15	b=150	20	+0.5	C4-H
WLB90T 3B229A	229.36	41310	90000	-50℃~60℃	-40℃~50℃	405	m=16	z=15	b=160	20	+0.5	C4-H
B5520A	229.8	34530	76516	-40℃~60℃	-40℃~55℃	485	m=16	z=15	b=170	20	+0.5	C4-VH
B8019A	226.84	31631	71650	-40℃~50℃	-30℃~40℃	405	m=16	z=15	b=165	20	+0.5	C4
B5024B	245.02	19400	58000	-40℃~60℃	-20℃~60℃	444	m=20	z=15	b=165	20	+0.5	C4-H
WLB100T 3B235A	233.51	39515	100000	-40℃~50℃	-30℃~40℃	455	m=16	z=15	b=170	20	+0.5	C4-VH
WLB100T 3B232A	233.51	39910	100000	-40℃~50℃	-30℃~40℃	548	m=20	z=15	b=170	20	+0.5	C4-VH
B1108A	261.88	41000	130000	-40℃~60℃	-30℃~60℃	635	m=20	z=15	b=210	20	+0.5	C4
WLB62T 3B229A	244.57	30425	79750	-40℃~50℃	-30℃~40℃	370	m=16	z=15	b=165	20	+0.5	C3-VH
WLB90T 3B246A	244.56	34500	90275	-40℃~55℃	-30℃~50℃	415	m=16	z=15	b=165	20	+0.5	C3-VH

双法兰变桨减速器
Dual Flange Variable Pitch Gearbox

尺寸参数 Dimensional Parameters

产品型号	L	LI	L2	L3	L4	L5	L6	L7	L8	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	B	d1	d2
B3029A	712	325	35	15	53	22	7	7	84	Φ240	Φ288	Φ324	Φ380	Φ420	1	Φ300	Φ265	Φ230H7	N35x2x30x16x9H DIN5480	160	30-Φ18 均布	8-M12 均布
B5025A	684	213	20	20	112.5	20	6	6	82	Φ240	Φ286h11	Φ320f7	Φ370	Φ400	1.5	Φ300	Φ265	Φ230F7	Φ38E7	130	20-Φ17 均布	4-M12 均布
B3032A	719	260	40	15	81	18	6	6	59	Φ224	Φ264.6	Φ310h8	Φ380	Φ415	1.5	Φ250	Φ215	Φ180F7	Φ28E8	130	30-Φ20 均布	12-M12 均布
B7521A	761.5	293	30	30	105	18	6	6	61	Φ210	Φ251	Φ330f7	Φ380	Φ420	1.5	Φ250	Φ215	Φ180F7	N38x2x30x18x9H DIN5480	160	24-Φ22 均布	8-M12 均布
B1103A	813.5	328	27	15	97	25	7	7	63	Φ240	Φ286	Φ364g7	Φ400	Φ440	1.5	Φ400	Φ350	Φ300H8	N45x2x30x21x9H DIN5480	170	24-Φ20 均布	8-M16 均布
B6016A	786	323	30	20	90	25	8	8	75	Φ240	Φ288	Φ368g7	Φ400	Φ440	1.5	Φ350	Φ300	Φ250F8	N45x2x30x21x9H DIN5480	165	24-Φ18 均布	8-M12 均布
B5020A	830	328	27	20	97	25	7	7	71	Φ240	Φ286	Φ364g6	Φ400	Φ440	1.5	Φ300	Φ265	Φ230F7	N45x2x30x21x9H DIN5480	170	24-Φ20 均布	8-M12 均布
B5019B	884.5	370	35	30	85	25	7	7	80	Φ300	Φ360h11	Φ380g7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N42x2x30x20x9H DIN5480	170	24-Φ22 均布	8-M16 均布
B7321A	904.5	414.5	37	28	125	32	6	6	65	Φ240	Φ288	Φ380f7	Φ500	Φ540	1.5	Φ400	Φ350	Φ300F7	N45x2x30x21x9H DIN5480	205	28-Φ22 均布	8-M16 均布
B905A	849.5	323	35	35	104	25	7	7	80	Φ240	Φ286	Φ400f7	Φ450	Φ500	1.5	Φ400	Φ350	Φ300F7	N50×2×30×24×9H DIN5480	170	32-Φ17.5 均布	8-M16 均布
B1803A	904.5	370	37	28	115	25	6	6	68	Φ300	Φ360	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300F7	N45x2x30x21x9H DIN5480	170	32-Φ22 均布	8-M16 均布
B505F	936	353	35	20	135	25	7	7	80	Φ252	Φ305	Φ450f7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50x2x30x24x9H DIN5480	180	36-Φ17.5 均布	8-M16 均布
B705A	936	383	35	35	105	25	7	7	80	Φ252	Φ305	Φ450f7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50x2x30x24x9H DIN5480	180	36-Φ17.5 均布	8-M16 均布
B1203A	946.5	438	35	30	88	26	7	7	63	Φ300	Φ360	Φ450g6	Φ500	Φ550	1.5	Φ400	Φ350	Φ300H8	N45x2x30x21x9H DIN5480	210	36-Φ17.5 均布	8-M16 均布
B655A	751	293	30	60	105	18	6	6	60	Φ210	Φ251h11	Φ330f7	Φ380	Φ420	1.5	Φ250	Φ215	Φ180F7	N38×2×30×18×9H DIN5480	160	24-Φ17.5 均布	8-M12 均布
B6615A	797	308	30	20	87	26	7	7	77	Φ240	Φ288	Φ368g7	Φ400	Φ440	1.5	Φ300	Φ265	Φ230F7	N42×2×30×20×9H DIN5480	150	24-Φ18 均布	8-M12 均布
WLB90T 3B229A	812.5	318	35	35	85	25	7	7	77	Φ240	Φ286	Φ368g7	Φ400	Φ440	1.5	Φ300	Φ265	Φ230F7	N42×2×30×20×9H DIN5480	160	24-Φ18 均布	8-M12 均布
B5520A	819	350	35	20	73	25	7	7	78	Φ240	Φ286	Φ425g7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50×2×30×24×9H DIN5480	170	24-Φ22 均布	16-M16 均布
B8019A	844.5	330	30	30	117	24	6	6	71	Φ240	Φ288h11	Φ340g7	Φ380	Φ420	1.5	Φ300	Φ265	Φ230F7	N38×2×30×18×9H DIN5480	165	24-Φ22 均布	8-M12 均布
B5024B	833	370	37	28	67.5	25	6	6	80	Φ300	Φ360	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230F7	N38×2×30×18×9H DIN5480	165	24-Φ22 均布	8-M12 均布
WLB100T 3B235A	826	328	37	15	95	25	7	7	63	Φ240	Φ286h11	Φ364g7	Φ400	Φ440	1.5	Φ400	Φ350	Φ300H8	N45×2×30×21×9H DIN5480	170	24-Φ20 均布	8-M16 均布
WLB100T 3B232A	880	370	37	28	110	25	7	7	63	Φ300	Φ360h11	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N45×2×30×21×9H DIN5480	170	32-Φ22 均布	8-M16 均布
B1108A	965.5	438	35	30	80	25	6	6	110	Φ300	Φ360h11	Φ450g6	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	Φ55E8	210	36-Φ17.5 均布	8-M16 均布
WLB62T 3B229A	786	323	30	20	90	25	8	8	75	Φ240	Φ288	Φ368g7	Φ400	Φ440	1.5	Φ350	Φ300	Φ250F8	N45×2×30×21×9H DIN5480	165	24-Φ18 均布	8-M12 均布
WLB90T 3B246A	819	323	30	20	90	25	8	8	75	Φ240	Φ288h11	Φ368g7	Φ400	Φ440	1.5	Φ350	Φ300	Φ250F7	N45×2×30×21×9H DIN5480	165	24-Φ18	8-M12

双法兰变桨减速器
Dual Flange Variable Pitch Gearbox

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

Type	Reducer Main Performance Parameters						Driving Gear Technical Parameters					Anti-corrosion Class
	Ratio	Rated Output Torque (Nm)	Limit Output Torque (Nm)	Ambient Tempe-rature	Operating Tempe-rature	Product Weight (Kg)	Module	Teeth Number	Face Width (mm)	Pressure Angle	Profile Shift Coefficient	
B3029A	155.63	10450	23500	-40℃~60℃	-30℃~60℃	278.5	m=16	z=15	b=160	20	+0.5	C4-H
B5025A	196.67	13800	39200	-40℃~60℃	-30℃~55℃	263	m=16	z=15	b=130	20	+0.5	C3-H
B3032A	192.03	12500	55000	-20℃~50℃	-10℃~40℃	285	m=14	z=16	b=130	20	+0.5	C3
B7521A	210.974	18535	56000	-40℃~50℃	-30℃~40℃	280	m=14	z=15	b=160	20	+0.5	C4-H
B1103A	235.71	36201	75000	-40℃~50℃	-30℃~40℃	390	m=16	z=15	b=170	20	+0.5	C4-VH
B6016A	244.57	30425	79750	-40℃~50℃	-30℃~40℃	370	m=16	z=15	b=165	20	+0.5	C3-VH
B5020A	234.95	29461	80000	-45℃~60℃	-40℃~55℃	390	m=16	z=15	b=170	20	+0.5	C4-H
B5019B	234.95	32568	93200	-40℃~50℃	-30℃~40℃	526	m=20	z=15	b=170	20	+0.5	C4
B7321A	229.802	16770	109000	-40℃~50℃	-30℃~40℃	500	m=16	z=15	b=205	20	+0.5	C4-H
B905A	239.14	30240	95000	-40℃~50℃	-30℃~50℃	468	m=16	z=15	b=170	20	+0.5	C4-VH
B1803A	231.43	39760	100000	-40℃~50℃	-30℃~40℃	545	m=20	z=15	b=170	20	+0.5	C4-VH
B505F	209.16	32075	125000	-40℃~50℃	-30℃~40℃	595	m=18	z=14	b=180	20	+0.5	+0.5
B705A	209.16	32220	125000	-40℃~50℃	-30℃~40℃	600	m=18	z=14	b=180	20	+0.5	C4-VH
B1203A	260.33	42900	130000	-40℃~50℃	-30℃~40℃	660	m=20	z=15	b=210	20	+0.5	C4-VH
B655A	213.9	18375	65000	-40℃~55℃	-30℃~50℃	315	m=14	z=15	b=160	20	+0.5	C4-VH
B6615A	230	28265	70000	-50℃~60℃	-40℃~50℃	380	m=16	z=15	b=150	20	+0.5	C4-H
WLB90T 3B229A	229.36	41310	90000	-50℃~60℃	-40℃~50℃	405	m=16	z=15	b=160	20	+0.5	C4-H
B5520A	229.8	34530	76516	-40℃~60℃	-40℃~55℃	485	m=16	z=15	b=170	20	+0.5	C4-VH
B8019A	226.84	31631	71650	-40℃~50℃	-30℃~40℃	405	m=16	z=15	b=165	20	+0.5	C4
B5024B	245.02	19400	58000	-40℃~60℃	-20℃~60℃	444	m=20	z=15	b=165	20	+0.5	C4-H
WLB100T 3B235A	233.51	39515	100000	-40℃~50℃	-30℃~40℃	455	m=16	z=15	b=170	20	+0.5	C4-VH
WLB100T 3B232A	233.51	39910	100000	-40℃~50℃	-30℃~40℃	548	m=20	z=15	b=170	20	+0.5	C4-VH
B1108A	261.88	41000	130000	-40℃~60℃	-30℃~60℃	635	m=20	z=15	b=210	20	+0.5	C4
WLB62T 3B229A	244.57	30425	79750	-40℃~50℃	-30℃~40℃	370	m=16	z=15	b=165	20	+0.5	C3-VH
WLB90T 3B246A	244.56	34500	90275	-40℃~55℃	-30℃~50℃	415	m=16	z=15	b=165	20	+0.5	C3-VH

双法兰变桨减速器
Dual Flange Variable Pitch Gearbox

尺寸参数 Dimensional Parameters

Type	L	LI	L2	L3	L4	L5	L6	L7	L8	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	B	d1	d2
B3029A	712	325	35	15	53	22	7	7	84	Φ240	Φ288	Φ324	Φ380	Φ420	1	Φ300	Φ265	Φ230H7	N35x2x30x16x9H DIN5480	160	30-Φ18 均布	8-M12 均布
B5025A	684	213	20	20	112.5	20	6	6	82	Φ240	Φ286h11	Φ320f7	Φ370	Φ400	1.5	Φ300	Φ265	Φ230F7	Φ38E7	130	20-Φ17 均布	4-M12 均布
B3032A	719	260	40	15	81	18	6	6	59	Φ224	Φ264.6	Φ310h8	Φ380	Φ415	1.5	Φ250	Φ215	Φ180F7	Φ28E8	130	30-Φ20 均布	12-M12 均布
B7521A	761.5	293	30	30	105	18	6	6	61	Φ210	Φ251	Φ330f7	Φ380	Φ420	1.5	Φ250	Φ215	Φ180F7	N38x2x30x18x9H DIN5480	160	24-Φ22 均布	8-M12 均布
B1103A	813.5	328	27	15	97	25	7	7	63	Φ240	Φ286	Φ364g7	Φ400	Φ440	1.5	Φ400	Φ350	Φ300H8	N45x2x30x21x9H DIN5480	170	24-Φ20 均布	8-M16 均布
B6016A	786	323	30	20	90	25	8	8	75	Φ240	Φ288	Φ368g7	Φ400	Φ440	1.5	Φ350	Φ300	Φ250F8	N45x2x30x21x9H DIN5480	165	24-Φ18 均布	8-M12 均布
B5020A	830	328	27	20	97	25	7	7	71	Φ240	Φ286	Φ364g6	Φ400	Φ440	1.5	Φ300	Φ265	Φ230F7	N45x2x30x21x9H DIN5480	170	24-Φ20 均布	8-M12 均布
B5019B	884.5	370	35	30	85	25	7	7	80	Φ300	Φ360h11	Φ380g7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N42x2x30x20x9H DIN5480	170	24-Φ22 均布	8-M16 均布
B7321A	904.5	414.5	37	28	125	32	6	6	65	Φ240	Φ288	Φ380f7	Φ500	Φ540	1.5	Φ400	Φ350	Φ300F7	N45x2x30x21x9H DIN5480	205	28-Φ22 均布	8-M16 均布
B905A	849.5	323	35	35	104	25	7	7	80	Φ240	Φ286	Φ400f7	Φ450	Φ500	1.5	Φ400	Φ350	Φ300F7	N50×2×30×24×9H DIN5480	170	32-Φ17.5 均布	8-M16 均布
B1803A	904.5	370	37	28	115	25	6	6	68	Φ300	Φ360	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300F7	N45x2x30x21x9H DIN5480	170	32-Φ22 均布	8-M16 均布
B505F	936	353	35	20	135	25	7	7	80	Φ252	Φ305	Φ450f7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50x2x30x24x9H DIN5480	180	36-Φ17.5 均布	8-M16 均布
B705A	936	383	35	35	105	25	7	7	80	Φ252	Φ305	Φ450f7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50x2x30x24x9H DIN5480	180	36-Φ17.5 均布	8-M16 均布
B1203A	946.5	438	35	30	88	26	7	7	63	Φ300	Φ360	Φ450g6	Φ500	Φ550	1.5	Φ400	Φ350	Φ300H8	N45x2x30x21x9H DIN5480	210	36-Φ17.5 均布	8-M16 均布
B655A	751	293	30	60	105	18	6	6	60	Φ210	Φ251h11	Φ330f7	Φ380	Φ420	1.5	Φ250	Φ215	Φ180F7	N38×2×30×18×9H DIN5480	160	24-Φ17.5 均布	8-M12 均布
B6615A	797	308	30	20	87	26	7	7	77	Φ240	Φ288	Φ368g7	Φ400	Φ440	1.5	Φ300	Φ265	Φ230F7	N42×2×30×20×9H DIN5480	150	24-Φ18 均布	8-M12 均布
WLB90T 3B229A	812.5	318	35	35	85	25	7	7	77	Φ240	Φ286	Φ368g7	Φ400	Φ440	1.5	Φ300	Φ265	Φ230F7	N42×2×30×20×9H DIN5480	160	24-Φ18 均布	8-M12 均布
B5520A	819	350	35	20	73	25	7	7	78	Φ240	Φ286	Φ425g7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50×2×30×24×9H DIN5480	170	24-Φ22 均布	16-M16 均布
B8019A	844.5	330	30	30	117	24	6	6	71	Φ240	Φ288h11	Φ340g7	Φ380	Φ420	1.5	Φ300	Φ265	Φ230F7	N38×2×30×18×9H DIN5480	165	24-Φ22 均布	8-M12 均布
B5024B	833	370	37	28	67.5	25	6	6	80	Φ300	Φ360	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230F7	N38×2×30×18×9H DIN5480	165	24-Φ22 均布	8-M12 均布
WLB100T 3B235A	826	328	37	15	95	25	7	7	63	Φ240	Φ286h11	Φ364g7	Φ400	Φ440	1.5	Φ400	Φ350	Φ300H8	N45×2×30×21×9H DIN5480	170	24-Φ20 均布	8-M16 均布
WLB100T 3B232A	880	370	37	28	110	25	7	7	63	Φ300	Φ360h11	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N45×2×30×21×9H DIN5480	170	32-Φ22 均布	8-M16 均布
B1108A	965.5	438	35	30	80	25	6	6	110	Φ300	Φ360h11	Φ450g6	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	Φ55E8	210	36-Φ17.5 均布	8-M16 均布
WLB62T 3B229A	786	323	30	20	90	25	8	8	75	Φ240	Φ288	Φ368g7	Φ400	Φ440	1.5	Φ350	Φ300	Φ250F8	N45×2×30×21×9H DIN5480	165	24-Φ18 均布	8-M12 均布
WLB90T 3B246A	819	323	30	20	90	25	8	8	75	Φ240	Φ288h11	Φ368g7	Φ400	Φ440	1.5	Φ350	Φ300	Φ250F7	N45×2×30×21×9H DIN5480	165	24-Φ18	8-M12

单法兰变桨减速器
Single Flange Variable Pitch Gearbox

标准配置 Standard Configuration

序号	名称	型号规格
1	内六角螺塞（注脂螺塞）	M10X1.0
2	内六角螺塞（加油螺塞）	G3/8"
3	标牌	80X50
4	内六角螺塞（放油螺塞）	G1/2"
5	内六角螺塞（注脂螺塞）	M10x1.0
6	圆油标	M18x1.5

No	Description	Type
1	Hex socket plug (Grease Injecting Plug)	M10X1.0
2	Hex socket plug (Oil Filling Plug)	G3/8"
3	Nameplate	80X50
4	Hex socket plug (Oil Drain Plug)	G1/2"
5	Hex socket plug (Grease Injecting Plug)	M10x1.0
6	Round Oil Level Indicator	M18x1.5

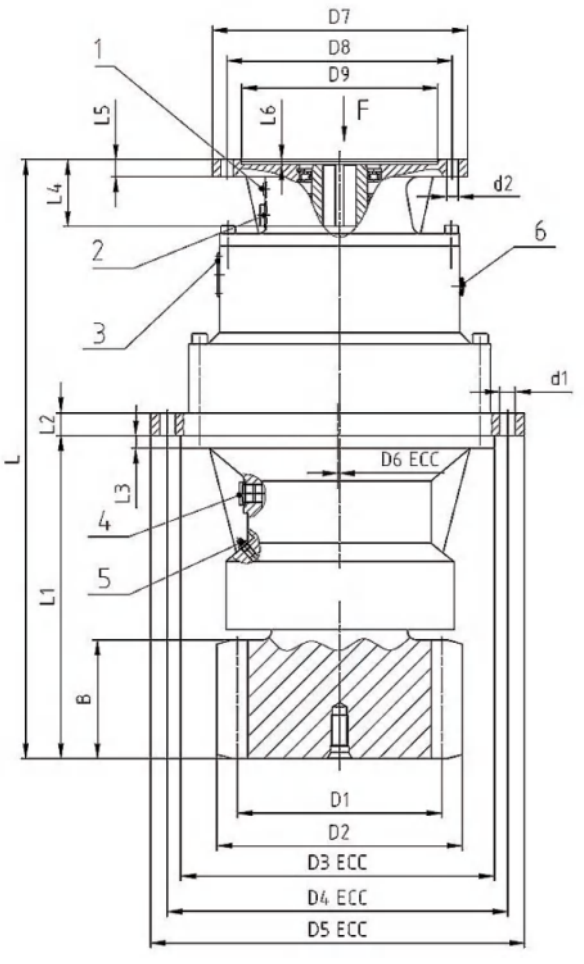

产品选型 Product Selection

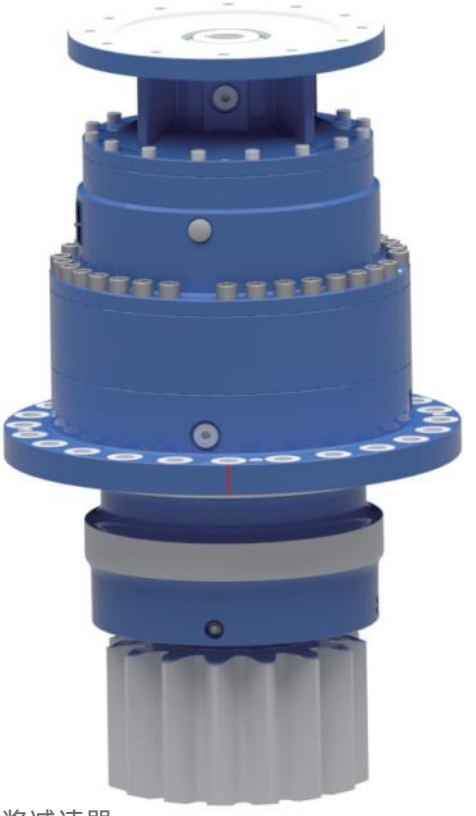

10MW 变桨减速器
10MW Pitch Gearbox

单法兰变桨减速器
Single Flange Variable Pitch Gearbox

技术参数 Technical Parameters

*可按客户需求正向开发产品

产品型号	减速器主要性能参数						驱动齿轮技术参数					防腐等级
	速比	额定输出扭矩 (Nm)	极限输出扭矩 (Nm)	环境温度	工作温度	产品重量 (kg)	模数	齿数	齿宽 (mm)	压力角	变位系数	
B3015A	195.1	17295	38136	-45℃~55℃	-35℃~50℃	261	m=16	z=14	b=139	20	+0.5	C4
B458B	222.86	27770	69000	-40℃~60℃	-30℃~60℃	400	m=16	z=15	b=165	20	+0.5	C4
B6121A	214.699	20926	70000	-40℃~50℃	-30℃~40℃	360	m=16	z=15	b=165	20	+0.5	C4-H
B5021A	236.25	25010	75000	-45℃~55℃	-40℃~50℃	435	m=16	z=15	b=170	20	+0.5	C4-H
B6021A	214.699	21011	75000	-40℃~50℃	-30℃~40℃	360	m=16	z=15	b=165	20	+0.5	C4-H
B1008A	251.59	34175	78000	-40℃~60℃	-30℃~60℃	415	m=16	z=15	b=165	20	+0.5	C4
B1303A	214.70	27770	80195	-40℃~50℃	-30℃~40℃	370	m=16	z=15	b=165	20	+0.5	C4-VH
B703D	205.71	42225	90500	-45℃~50℃	-30℃~40℃	510	m=20	z=15	b=170	20	+0.5	C4-VH
B7021A	234.95	32940	94000	-40℃~50℃	-30℃~40℃	513	m=16	z=15	b=205	20	+0.5	C4-H
B7221A	229.802	33045	95000	-40℃~50℃	-30℃~40℃	465	m=16	z=15	b=205	20	+0.5	C4-H
B2003A	187.56	28265	100000	-40℃~50℃	-30℃~40℃	465	m=20	z=15	b=170	20	+0.5	C4-VH
B1505A	213.23	34210	150000	-40℃~55℃	-30℃~50℃	650	m=20	z=15	b=210	20	+0.5	C4-VH
B2205A	228.57	38105	220000	-40℃~60℃	-30℃~55℃	900	m=20	z=17	b=210	20	+0.5	C4-VH
WLB85T 3B252A	251.59	35550	85000	-40℃~60℃	-30℃~60℃	415	m=16	z=15	b=165	20	+0.5	C4
WLB100T 3B252A	251.99	32265	100000	-40℃~60℃	-30℃~60℃	440	m=16	z=15	b=165	20	+0.5	C4
WLB150T 3B315A	316.45	35870	150000	-40℃~60℃	-30℃~60℃	635	m=20	z=15	b=210	20	+0.5	C4
B8022A	181.22	9515	84600	-20℃~60℃	-10℃~50℃	437	m=16	z=23	b=190	20	+0.0063	C4-VH
WLB100T 3B187A	187.56	28265	100000	-40℃~50℃	-30℃~40℃	466	m=20	z=15	b=170	20	+0.5	C4-VH
WLB63T 3B240A	242.46	16000	63000	-40℃~60℃	-40℃~60℃	358	m=18	m=14	b=150	20	+0.5	C3-H
WLB91T 3B246A	243.82	38185	90660	-40℃~55℃	-30℃~50℃	441	m=16	z=15	b=165	20	+0.5	C4-H
WLB130T 3B261A	260.78	42310	130000	-40℃~50℃	-30℃~50℃	627	m=20	z=15	b=180	20	+0.5	C4-VH
WLB113T 3B229A	229.8	35690	113140	-40℃~50℃	-30℃~55℃	522	m=20	z=15	b=170	20	+0.5	C4-VH

单法兰变桨减速器
Single Flange Variable Pitch Gearbox

尺寸参数 Dimensional Parameters

产品型号	L	LI	L2	L3	L4	L5	L6	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	B	d1	d2
B3015A	712.5	380	27	15	78.5	20	6	Φ224	φ272h9	φ368g6	Φ400	φ440	1	Φ250	Φ215	Φ180F7	φ38E8	139	24-Φ17 均布	12-M12 均布
B458B	830.5	373	35	15	110	25	7	Φ240	Φ288h11	Φ380h8	Φ460	Φ505	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
B6121A	837	502	40	15	75	25	8	Φ240	Φ286	Φ425f7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N45x2x30x21x9H DIN5480	165	24-Φ18 均布	8-M12 均布
B5021A	823.5	375	37	28	80	25	7	Φ240	Φ286.4h9	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230H8	N38x2x18-9H DIN5480	170	24-Φ22 均布	8-M12 均布
B6021A	837	502	40	15	75	25	8	Φ240	Φ286	Φ410f7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N45x2x30x21x9H DIN5480	165	24-Φ22 均布	8-M12 均布
B1008A	849.5	373	35	15	110	25	7	Φ240	Φ288h11	Φ380h8	Φ460	Φ505	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
B1303A	844	542	40	15	63	25	7	Φ240	Φ286h9	Φ425f7	Φ460	Φ500	1.5	Φ400	Φ350	Φ300H8	N50x2x30x24x9H DIN5480	165	24-Φ18 均布	8-M16 均布
B703D	815	370	37	28	69	25	7	Φ300	Φ358	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N45x2x30x21x9H DIN5480	170	32-Φ22 均布	8-M16 均布
B7021A	886	414.5	37	28	80	25	7	Φ240	Φ288h11	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230H8	N38x2x30x18x9H DIN5480	205	24-Φ22 均布	8-M12 均布
B7221A	818.5	414.5	37	28	80	25	6	Φ240	Φ288	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230F7	N38x2x30x18x9H DIN5480	205	24-Φ22 均布	8-M12 均布
B2003A	795	370	37	28	63	25	7	Φ300	Φ360h11	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N50x2x30x24x9H DIN5480	170	32-Φ22 均布	8-M16 均布
B1505A	939	458	35	35	80	25	7	Φ300	Φ360h11	Φ450f7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50x2x30x24x9HDI N5480	210	30-Φ22 均布	8-M16 均布
B2205A	905.5	458	40	40	80	30	7	Φ340	Φ398h11	Φ470f7	Φ500	Φ690	1.5	Φ450	Φ400	Φ350F7	N75x2x30x24x9H DIN5480	210	38-Φ22 均布	8-M16 均布
WLB85T 3B252A	793.5	373	35	15	110	25	7	Φ240	Φ288h11	Φ380h8	Φ460	Φ505	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
WLB100T 3B252A	829.5	373	35	20	110	25	7	Φ240	Φ288h11	Φ380h8	Φ480	Φ525	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
WLB150T 3B315A	928	438	35	30	110	25	6	Φ300	Φ360h11	Φ450g6	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	φ55E8	210	36-Φ17.5 均布	8-M16 均布
B8022A	755	410	40	20	61	20	6	Φ368	Φ400	Φ410f7	Φ450	Φ490	1.5	Φ300	Φ265	Φ230F6	N40×2×18×9H DIN5480	190	24-Φ21 均布	8-M12 均布
WLB100T 3B187A	760	370	37	28	63	25	7	Φ300	Φ360h11	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N45×2×30×21×9H DIN5480	170	32-Φ22 均布	8-M16 均布
WLB63T 3B240A	801.5	500	40	20	78	19	7	Φ252	Φ305 (0~-0.5)	Φ425h7	Φ460	Φ496	0	Φ300	Φ265	Φ230H7	Φ38E8	150	24-Φ20	8-M12
WLB91T 3B246A	796.5	382.5	30	20/60	75	25	8	Φ240	Φ288h11	Φ410f7/ Φ370f7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N45×2×30×21×9H DIN5480	165	36-Φ18	8-M12
WLB130T 3B261A	824	360	35	35	72	25	7	Φ300	Φ356h11	Φ450g7	Φ560	Φ620	2	Φ400	Φ350	Φ300F7	N45×2×30×24×9H DIN5480	180	24-Φ26	16-M16
WLB113T 3B229A	787.5	350	35	20	72	25	7	Φ300	φ356h11	Φ425g7	Φ500	Φ550	2	Φ400	Φ350	Φ300F7	N45×2×30×24×9H DIN5480	170	24-Φ22	16-M16

单法兰变桨减速器
Single Flange Variable Pitch Gearbox

技术参数 Technical Parameters

*可按客户需求正向开发产品
Customized development available upon request

Type	Reducer Main Performance Parameters						Driving Gear Technical Parameters					Anti-corrosion Class
	Ratio	Rated Output Torque (Nm)	Limit Output Torque (Nm)	Ambient Tempe-rature	Operating Tempe-rature	Product Weight (Kg)	Module	Teeth Number	Face Width (mm)	Pressure Angle	Profile Shift Coefficient	
B3015A	195.1	17295	38136	-45℃~55℃	-35℃~50℃	261	m=16	z=14	b=139	20	+0.5	C4
B458B	222.86	27770	69000	-40℃~60℃	-30℃~60℃	400	m=16	z=15	b=165	20	+0.5	C4
B6121A	214.699	20926	70000	-40℃~50℃	-30℃~40℃	360	m=16	z=15	b=165	20	+0.5	C4-H
B5021A	236.25	25010	75000	-45℃~55℃	-40℃~50℃	435	m=16	z=15	b=170	20	+0.5	C4-H
B6021A	214.699	21011	75000	-40℃~50℃	-30℃~40℃	360	m=16	z=15	b=165	20	+0.5	C4-H
B1008A	251.59	34175	78000	-40℃~60℃	-30℃~60℃	415	m=16	z=15	b=165	20	+0.5	C4
B1303A	214.70	27770	80195	-40℃~50℃	-30℃~40℃	370	m=16	z=15	b=165	20	+0.5	C4-VH
B703D	205.71	42225	90500	-45℃~50℃	-30℃~40℃	510	m=20	z=15	b=170	20	+0.5	C4-VH
B7021A	234.95	32940	94000	-40℃~50℃	-30℃~40℃	513	m=16	z=15	b=205	20	+0.5	C4-H
B7221A	229.802	33045	95000	-40℃~50℃	-30℃~40℃	465	m=16	z=15	b=205	20	+0.5	C4-H
B2003A	187.56	28265	100000	-40℃~50℃	-30℃~40℃	465	m=20	z=15	b=170	20	+0.5	C4-VH
B1505A	213.23	34210	150000	-40℃~55℃	-30℃~50℃	650	m=20	z=15	b=210	20	+0.5	C4-VH
B2205A	228.57	38105	220000	-40℃~60℃	-30℃~55℃	900	m=20	z=17	b=210	20	+0.5	C4-VH
WLB85T 3B252A	251.59	35550	85000	-40℃~60℃	-30℃~60℃	415	m=16	z=15	b=165	20	+0.5	C4
WLB100T 3B252A	251.99	32265	100000	-40℃~60℃	-30℃~60℃	440	m=16	z=15	b=165	20	+0.5	C4
WLB150T 3B315A	316.45	35870	150000	-40℃~60℃	-30℃~60℃	635	m=20	z=15	b=210	20	+0.5	C4
B8022A	181.22	9515	84600	-20℃~60℃	-10℃~50℃	437	m=16	z=23	b=190	20	+0.0063	C4-VH
WLB100T 3B187A	187.56	28265	100000	-40℃~50℃	-30℃~40℃	466	m=20	z=15	b=170	20	+0.5	C4-VH
WLB63T 3B240A	242.46	16000	63000	-40℃~60℃	-40℃~60℃	358	m=18	m=14	b=150	20	+0.5	C3-H
WLB91T 3B246A	243.82	38185	90660	-40℃~55℃	-30℃~50℃	441	m=16	z=15	b=165	20	+0.5	C4-H
WLB130T 3B261A	260.78	42310	130000	-40℃~50℃	-30℃~50℃	627	m=20	z=15	b=180	20	+0.5	C4-VH
WLB113T 3B229A	229.8	35690	113140	-40℃~50℃	-30℃~55℃	522	m=20	z=15	b=170	20	+0.5	C4-VH

单法兰变桨减速器
Single Flange Variable Pitch Gearbox

尺寸参数 Dimensional Parameters

Type	L	LI	L2	L3	L4	L5	L6	D1	D2	D3	D4	D5	D6	D7	D8	D9	D10	B	d1	d2
B3015A	712.5	380	27	15	78.5	20	6	Φ224	φ272h9	φ368g6	Φ400	φ440	1	Φ250	Φ215	Φ180F7	φ38E8	139	24-Φ17 均布	12-M12 均布
B458B	830.5	373	35	15	110	25	7	Φ240	Φ288h11	Φ380h8	Φ460	Φ505	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
B6121A	837	502	40	15	75	25	8	Φ240	Φ286	Φ425f7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N45x2x30x21x9H DIN5480	165	24-Φ18 均布	8-M12 均布
B5021A	823.5	375	37	28	80	25	7	Φ240	Φ286.4h9	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230H8	N38x2x18-9H DIN5480	170	24-Φ22 均布	8-M12 均布
B6021A	837	502	40	15	75	25	8	Φ240	Φ286	Φ410f7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N45x2x30x21x9H DIN5480	165	24-Φ22 均布	8-M12 均布
B1008A	849.5	373	35	15	110	25	7	Φ240	Φ288h11	Φ380h8	Φ460	Φ505	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
B1303A	844	542	40	15	63	25	7	Φ240	Φ286h9	Φ425f7	Φ460	Φ500	1.5	Φ400	Φ350	Φ300H8	N50x2x30x24x9H DIN5480	165	24-Φ18 均布	8-M16 均布
B703D	815	370	37	28	69	25	7	Φ300	Φ358	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N45x2x30x21x9H DIN5480	170	32-Φ22 均布	8-M16 均布
B7021A	886	414.5	37	28	80	25	7	Φ240	Φ288h11	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230H8	N38x2x30x18x9H DIN5480	205	24-Φ22 均布	8-M12 均布
B7221A	818.5	414.5	37	28	80	25	6	Φ240	Φ288	Φ380f7	Φ480	Φ520	1.5	Φ300	Φ265	Φ230F7	N38x2x30x18x9H DIN5480	205	24-Φ22 均布	8-M12 均布
B2003A	795	370	37	28	63	25	7	Φ300	Φ360h11	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N50x2x30x24x9H DIN5480	170	32-Φ22 均布	8-M16 均布
B1505A	939	458	35	35	80	25	7	Φ300	Φ360h11	Φ450f7	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	N50x2x30x24x9HDI N5480	210	30-Φ22 均布	8-M16 均布
B2205A	905.5	458	40	40	80	30	7	Φ340	Φ398h11	Φ470f7	Φ500	Φ690	1.5	Φ450	Φ400	Φ350F7	N75x2x30x24x9H DIN5480	210	38-Φ22 均布	8-M16 均布
WLB85T 3B252A	793.5	373	35	15	110	25	7	Φ240	Φ288h11	Φ380h8	Φ460	Φ505	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
WLB100T 3B252A	829.5	373	35	20	110	25	7	Φ240	Φ288h11	Φ380h8	Φ480	Φ525	1.5	Φ350	Φ300	Φ250F7	φ42E8	165	24-Φ22 均布	12-M16 均布
WLB150T 3B315A	928	438	35	30	110	25	6	Φ300	Φ360h11	Φ450g6	Φ500	Φ550	1.5	Φ400	Φ350	Φ300F7	φ55E8	210	36-Φ17.5 均布	8-M16 均布
B8022A	755	410	40	20	61	20	6	Φ368	Φ400	Φ410f7	Φ450	Φ490	1.5	Φ300	Φ265	Φ230F6	N40×2×18×9H DIN5480	190	24-Φ21 均布	8-M12 均布
WLB100T 3B187A	760	370	37	28	63	25	7	Φ300	Φ360h11	Φ410f7	Φ480	Φ530	1.5	Φ400	Φ350	Φ300H8	N45×2×30×21×9H DIN5480	170	32-Φ22 均布	8-M16 均布
WLB63T 3B240A	801.5	500	40	20	78	19	7	Φ252	Φ305 (0~-0.5)	Φ425h7	Φ460	Φ496	0	Φ300	Φ265	Φ230H7	Φ38E8	150	24-Φ20	8-M12
WLB91T 3B246A	796.5	382.5	30	20/60	75	25	8	Φ240	Φ288h11	Φ410f7/ Φ370f7	Φ460	Φ500	1.5	Φ350	Φ300	Φ250F7	N45×2×30×21×9H DIN5480	165	36-Φ18	8-M12
WLB130T 3B261A	824	360	35	35	72	25	7	Φ300	Φ356h11	Φ450g7	Φ560	Φ620	2	Φ400	Φ350	Φ300F7	N45×2×30×24×9H DIN5480	180	24-Φ26	16-M16
WLB113T 3B229A	787.5	350	35	20	72	25	7	Φ300	¶356h11	Φ425g7	Φ500	Φ550	2	Φ400	Φ350	Φ300F7	N45×2×30×24×9H DIN5480	170	24-Φ22	16-M16

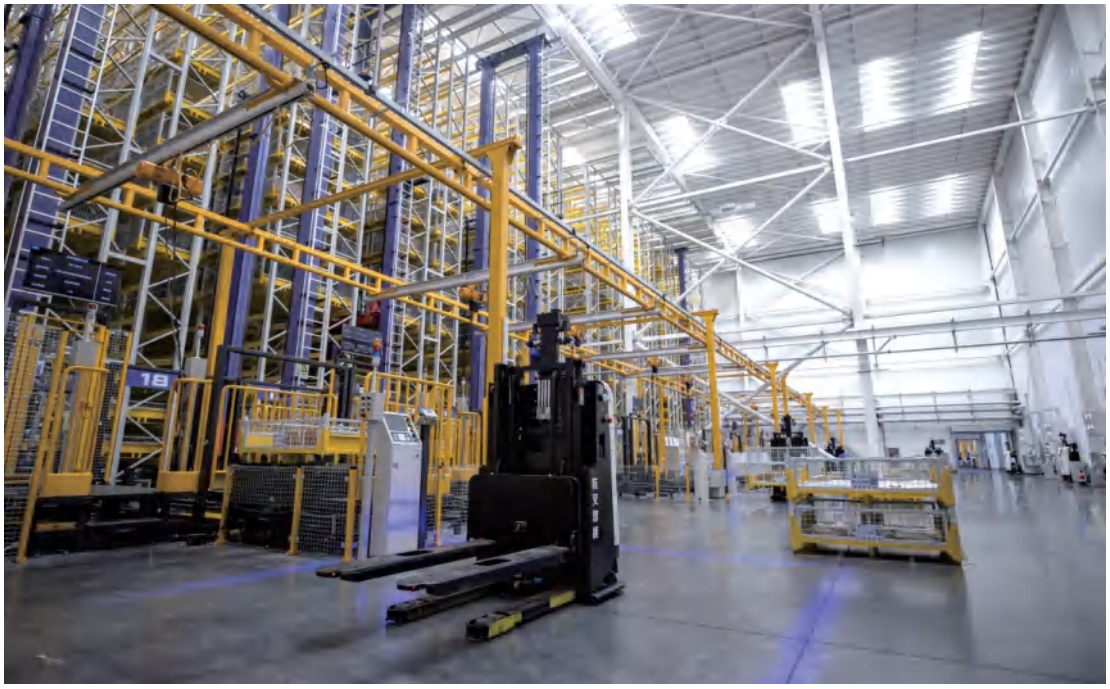

WEILI
TRANSMISSION

扫码了解最新资讯
Scan the code for the latest news

银川威力传动技术股份有限公司
Yinchuan Weili Transmission Technology Co.,Ltd

银川威马电机有限责任公司
Yinchuan Weima motor Co., Ltd

银川威力传动技术股份有限公司上海分公司
Yinchuan Weili Transmission Technology Co.,Ltd Shanghai Branch

公司网址 Company Website：www.weili.com
销售电话：0951-7601777　服务电话：17809404506
公司地址 Company Address:
宁夏银川市西夏区文萃南街600号 No.600,South Wencui St.,Yinchuan,Ningxia
宁夏银川市西夏区黄河西路332号 No.332,West Huanghe Rd.,Yinchuan,Ningxia
上海市长宁区淞虹路207号C幢6楼B单元 6F,Building C,No.207 Songhong Rd.,Shanghai